

GLAZING OPTIONS

- 1 ¼” GLAZING
- Sponge and wedge gaskets to seal gaps

ANODIZING FINISH OPTIONS

- Clear Anodizing
- Dark Bronze Anodizing


Other custom coating options are available upon inquiry

PROPERTIES & SPECIFICATIONS

Protection	.44 Mag
Ballistic Data	Velocity 1: ≤1350 ft/s Velocity 2: ≤1485 ft/s
Cut Away Dimensions for 2 pc	1 ¼” by 2 ½”
Tube & 2 Pc Weight	4.8 lbs per lineal ft
Fiberglass packing	None

2 PIECE CHANNEL & FRAMING

PRODUCT: B.L. 1.75 & 4” TUBE

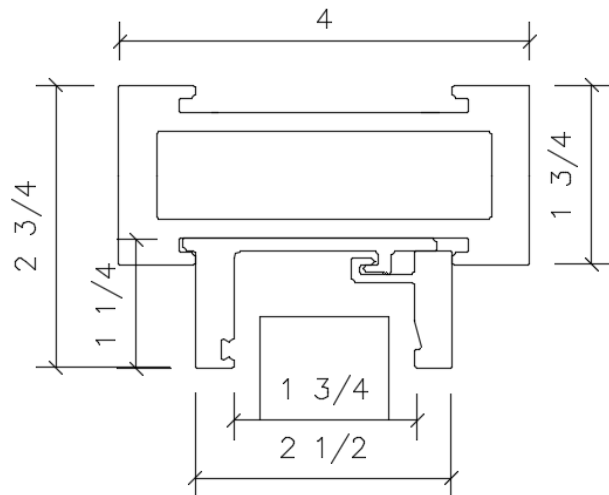

BALLISTIC RATING

- U.L. 752 Level – .44 Mag

LIMITED WARRANTY

12-month limited warranty. Does not cover damage from neglect, abuse, vandalism, improper maintenance, or any other cause not arising out of defects in material or workmanship. The warranties stated replace and exclude all other warranties. The warranty is limited to replacing products that fail to meet specification, defective in quality, or workmanship at time of delivery. TSS is not responsible for (re)installation expenses or any direct or indirect loss(es) which may result from a defective product. TSS reserves the right to field inspect any product alleged to be defective. Buyer is responsible for any consequences from product use.

INSTALLATION

Do not begin installation until openings have been verified and surfaces properly prepared in accordance with Drawings. Install in accordance with manufacturer’s instructions and UL 752. Set all equipment plumb.

TSS Bullet Resistant Storefronts Install in accordance with manufacturer’s instructions.

- Install plumb, level, square, true to line, and without warp or rack. Provide all fasteners required for installation.
- Anchor frames securely in place to supports. Use attachment methods permitting adjustment for construction tolerances, irregularities, alignment, and expansion and contraction.
- Separate aluminum from other metal surfaces with bituminous coatings or other means approved by Architect.
- Sheet Metal Flashing: Coordinate with sheet metal flashing as specified in Section 07620.
- Joint Sealants: Install joint sealants as specified in Section 07920.